



# ***Mustang***

## ***Floor Machine***



For a durable, powerful floor machine in an economical package, choose the Mustang. Precision balanced for easy operation and maneuverability, this machine scrubs, strips, spray buffs, polishes, and shampoos at 175 RPM.

- The Mustang features a straight line planetary gear system that provides efficient transfer of power from the motor to the pad driver. This design ensures years of smooth, quiet, trouble-free operation.
- A mechanical lock-out on the handle must be released before the switch lever on the Mustang will activate. This special safety mechanism helps prevent unauthorized operation when the machine is unattended.
- The Mustang is ideal for schools, office buildings and other facilities where appearances need to be kept up while holding equipment costs down.
- The Mustang comes with either a 1 HP or 1.5 HP 66-frame motor, and is available in 17 and 20-inch widths.

**NSS Enterprises, Inc.**  
3115 Frenchmens Road  
Toledo, Ohio 43607-2958  
USA  
[www.nss.com](http://www.nss.com)



# Mustang Specifications

Pad or Brush -Speed -Size	175 RPM 17 in. (43 cm) 20 in. (51 cm)	Cord -120V. -240V.	Safety yellow 50 ft. (15.2 m) 14-3 ST 75 ft. (23 m) 16-3 ST
Motor -HP -Size -Voltage	1 HP or 1.5 HP 66 frame 110-120V. 220-240V. available	Weight -Machine • 17-in. 1 HP • 20-in. 1 HP • 17-in. 1.5 HP • 20-in. 1.5 HP	93 lbs. (42.2 kg) 107 lbs. (48.6 kg) 100 lbs. (45.4 kg) 114 lbs. (51.8 kg)
Current -1 HP -1.5 HP	13.4 amps @ 120V    6.7 amps @ 240V 14.8 amps @ 120V    7.4 amps @ 240V	-Shipping • 17-in. 1 HP • 20-in. 1 HP • 17-in. 1.5 HP • 20-in. 1.5 HP	112 lbs. (50.8 kg) 126 lbs. (57.2 kg) 119 lbs. (54 kg) 133 lbs. (60.4 kg)
Gears -1 HP -1.5 HP	2-idler planetary 3-idler planetary	Warranty	3 year limited

Productivity — Measured in square feet per hour.

	Shampoo	Scrub	Polish	Spray Buff
Mustang 17 in.	1,200	2,700	4,400	1,900
Mustang 20 in.	1,430	3,600	6,300	2,100



The Mustang features a mechanical lock-out on the handle, which must be released before the switch lever can be activated. This important safety mechanism helps deter unauthorized operation when the machine is unattended.

**1** Metal cord strain relief and internal compression lock prevent the cord from being pulled out of the machine.


**5** Dual switch levers allow the operator to easily control the side-to-side movement of the machine.

**2** Sturdy 1.5-in. tube handle is chrome-plated to resist corrosion.



**3** 360° non-marking bumper protects walls and fixtures from accidental damage.

**4** 5-in. rear transport wheels make the Mustang easy to move to the job site.

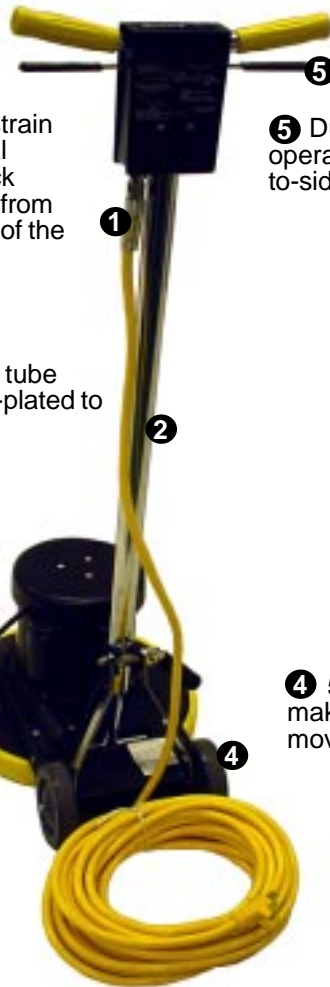

**NSS® Enterprises, Inc.**  
3115 Frenchmens Road  
Toledo, Ohio 43607-2958 USA  
419/531-2121 Fax 419/531-3761  
[www.nss.com](http://www.nss.com)  
[mailus@nss.com](mailto:mailus@nss.com)  
Specifications and appearance  
subject to change without notice.

DISTRIBUTED BY